



ANGEL 2.0

SINGLE BUCK PRESS




WWW.PONY-USA.COM



PONY USA
FINISHING FIRST

H.A.R.S. : Hot Air Recovery System (patented)



Teflon-coated shoulder pressing device



Pony touch logic





Teflon-coated sleeve-placket pressing devices

Solid and compact frame work

Adjustable height

• Dimensions mm (inch)




MINIMUM PASSAGE DIMENSIONS

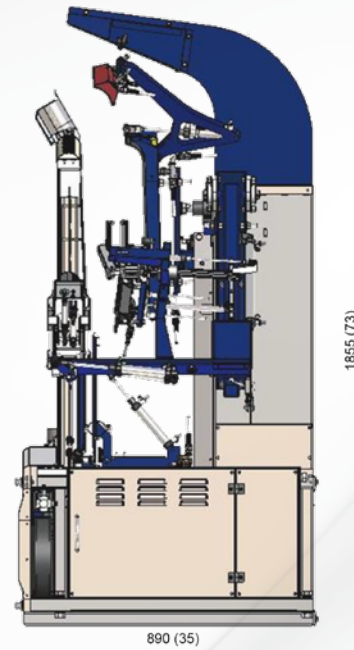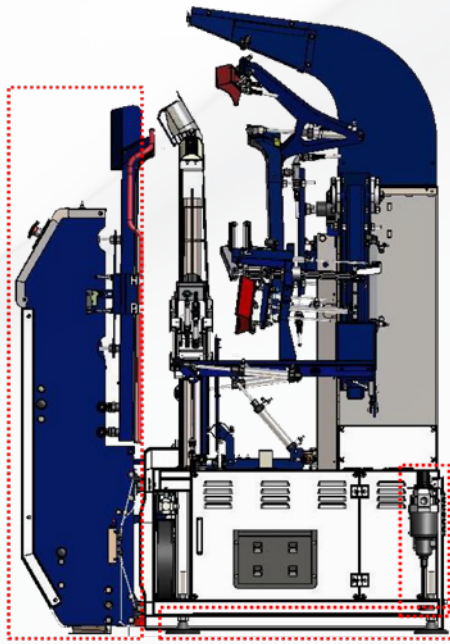

 = PARTI REMOVIBILI / REMOVABLE PARTS

• Dimensions mm (inch)

MAXIMUM DIMENSIONS IN OPERATION

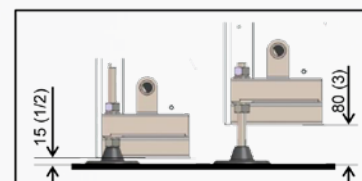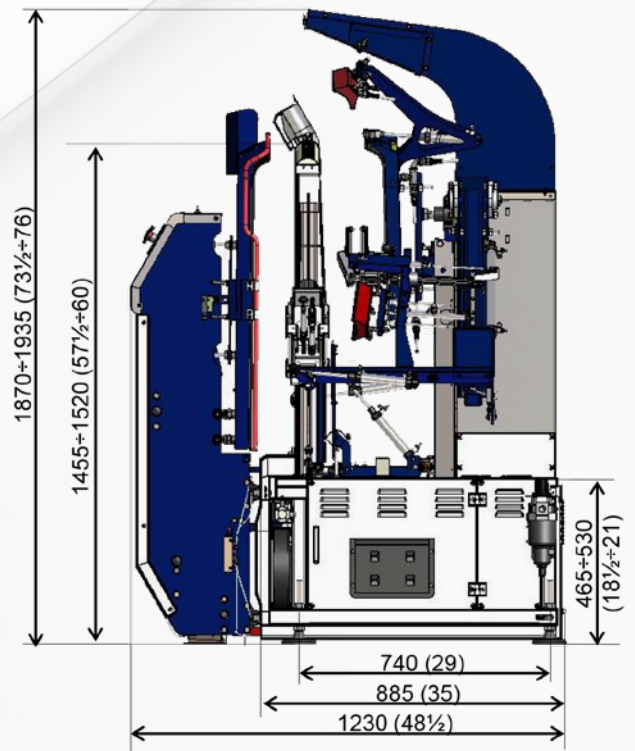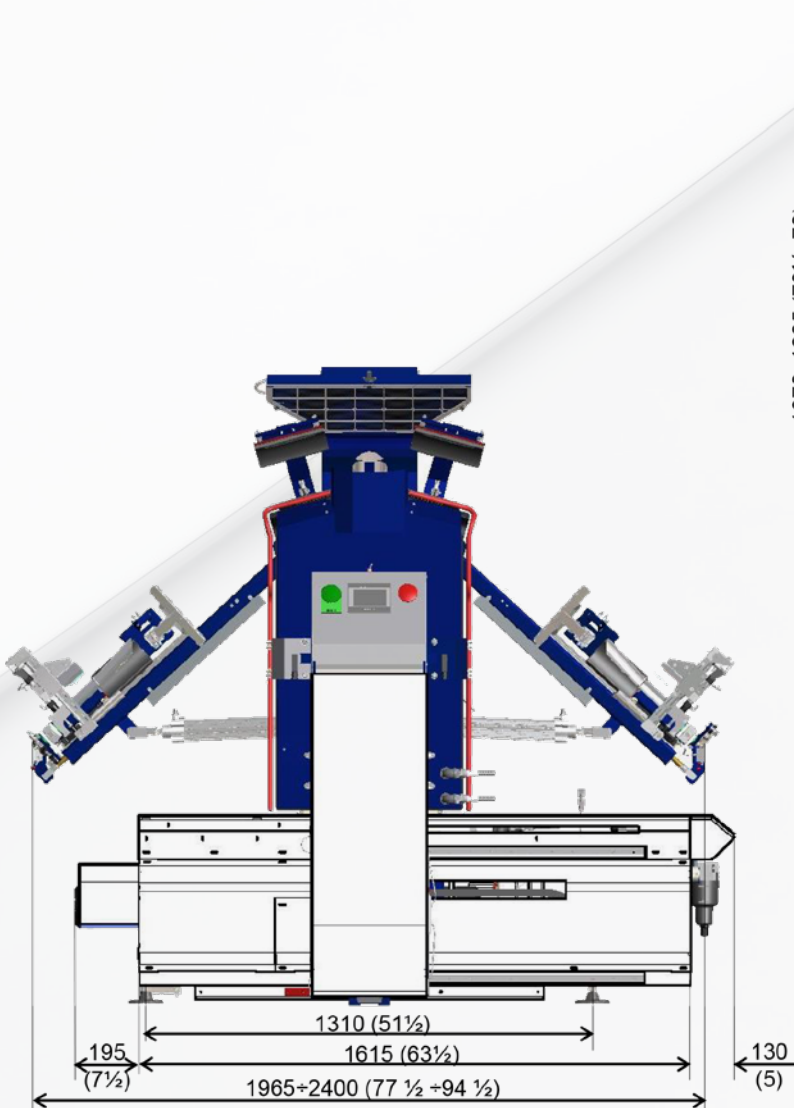

Feet adjustment: +65mm (2 1/2 in)

Enhancing a successful and reliable machine like the Angel is not an easy task, but Pony made it possible thanks to thorough research, feedback from existing clients understanding their needs and then incorporating this into the best solutions. Pony's shirt-press unit finds its evolution stage in the **ANGEL 2.0**, which features the patented H.A.R.S. device for the re-cycling of hot air from the upper part of the dummy. This air will then be reused at a higher temperature during the finishing operation. The benefits with this machine are: reduced drying time thanks to faster cycles, lower steam consumption and heat/moist dissipation, for a better work environment. Its height can be adjusted so that the neck-holder stands at a minimum of 1440 mm to a maximum of 1520mm from the floor, thus allowing all operators, tall or short, to operate with a correct and ergonomic posture, with lower fatigue levels and uncompromised performance.

Just like all shirt finishers, the ANGEL 2.0 comes with the PONY technologies.

- **PONY SLEEVE TECHNOLOGY:** special rounded and rotary clamps, with pneumatic height adjustment and Teflon-coated surface, assembled to the innovative "reverse V-shaped" structure of the sleeve-stretching arms, ensuring stability and precision of movement, which translates into an impeccable finishing that requires no touch-ups.
- **PONY H.A.R.S. TECHNOLOGY:** the patented PONY system for the recovery of hot air produced by the machine. It allows a significant reduction in drying times, lowers consumptions, and improves productivity and temperature inside the work environment.
- **PONY TOUCH TECHNOLOGY:** colour touchscreen HMI for total machine control. Pony Touch Logic allows you to easily customise and save operational programmes, check productivity, access diagnostic features and maintenance alerts, perform auto-tests and software updates. If connected to the network via an Ethernet port, all operations can also be performed remotely.
- **PONY NO-SHINE TECHNOLOGY:** all the pressing parts that directly touch the fabric are Teflon-coated to prevent shiny marks on dark fabrics.

Included as standard:

- short sleeve device.

TECHNICAL DATA	ANGEL 2.0
REQUIRED POWER	220/3/60Hz 7A
VACUUM MOTOR	0,37 Kw
FAN MOTOR	1,5 Kw
STEAM INLET	1/2"
CONDENSATE RETURN OUTLET	n°2 x 1/2"
STEAM WORKING PRESSURE	70 ÷ 100 psi
STEAM CONSUMPTION	50 ÷ 60 lbs/h
AIR INLET	1/2"
AIR WORKING PRESSURE	100 psi
AIR CONSUMPTION	2,00 cubic feet/cycle
NET WEIGHT	1.490 lbs
GROSS WEIGHT	1.710 lbs
PACKAGE DIMENSIONS (L X W X H)	78 x 53 x 79 in
VOLUME	184 cubic feet

